

Product Feature:

- low power consumption
- high brightness SMD led
- Led lighting angle: 120°
- Operation temperature: -20-50°C
- Dimmable by using dimmer controller
- Water-proof rating IP 65
- Store Temperature :-50°C - +60°C
- No flickering No RF interference
- No UV radiation instant soft start





Application

- Backlighting for signage letters,
- Backlighting for PMMA block letters
- Architectural decorative lighting
- Emergency exit path lighting
- Amusement park, theater and aircraft cabin mood lighting
- Emergency hallway lighting
- Emergency exit path lighting

Fixed mode

- 3M double sided adhesive

Dimension:

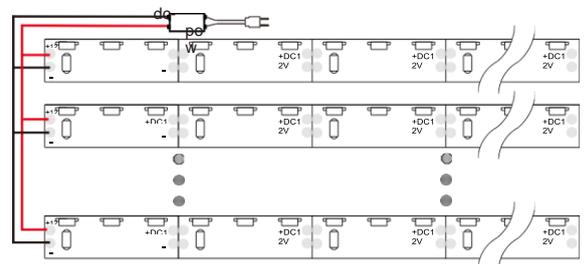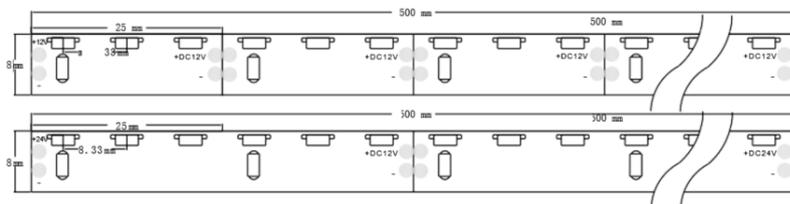

| Model | LED Type | Leds/m | Watt/m | Voltage | Lumens/m | FPC Width(mm) |
|-------------------|----------|--------|--------|---------|----------|---------------|
| Tulight Side View | 335 | 60 | 4.8 | 12V | W/714 | 8 |

Wavelength Scope(nm/K)

| Red light | Green light | Blue light | Yellow light | Warm white | White light | Cool white |
|-----------|-------------|------------|--------------|------------|-------------|------------|
| 619-635 | 512-528 | 463-475 | 584-595 | 2700-3300K | 5500-7000 | >8000K |

Notes


1. The thickness of the wires shall be adopted based on the possible current, products power, length of the wire extension (5meter at maximum as recommended) and the loss in the wires transit at low voltage.
2. The both ends of extension shall be delt with as waterproof.
3. Don't work under the situations of touching in static-electronics environments or light on
4. The modules can be connected to 5m at maximum and no exceed.
5. Suggest choosing high-qualified switch power(have short electronics ,overvoltage and overloading protection function etc).

Packaging information

| Product name | Weight per pcs. | Packing bag dimension(mm) | Net weight(NG) | Gross Weight(WG) |
|--------------|-----------------|---------------------------|----------------|------------------|
| | | 37*34*34c m | 8.5±10%Kg | 10±15%Kg |

①Tolerance range for weight: ±10 %.

②With Heatsink.

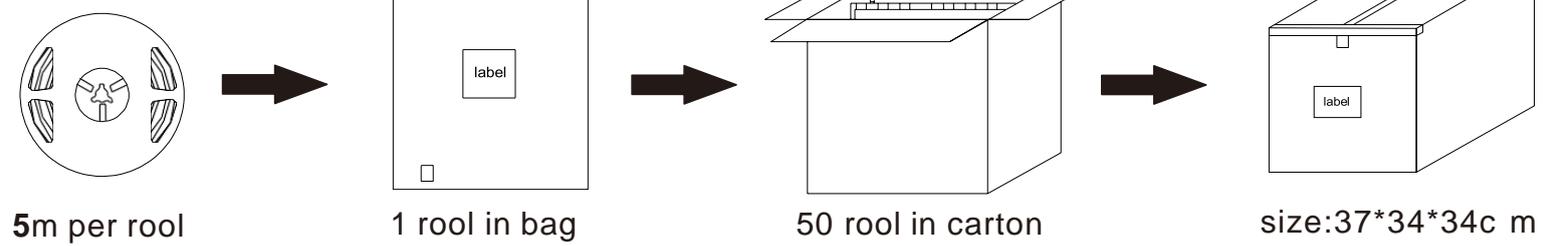

Waterproof options

IP64-Spray sillcone; IP64-Silicone glue potted; IP65-Silicone sleeved
 IP68-Extrusion silicone

A row of icons representing different waterproofing and warranty options:

- Spray Silicone
- Silicone glue potted
- Silicone sleeved
- Extrusion Silicone
- 3years warranty
- DC
- UV absorber
- Silicone