

## Product Feature:

- Low power consumption
- High brightness SMD led
- Led lighting angle: 120°
- Operation temperature: -20-50°C
- Dimmable by using dimmer controller
- Water-proof rating IP 20
- Store Temperature :-50°C - +60°C


## Application

- Bending parts suitable for small words, resin words, flat, ultra thin light boxes
- Lighting signs,
- Billboards and other small space products
- Emergency exit path lighting
- Emergency hallway lighting




## Fixed mode

- 3M double sided adhesive

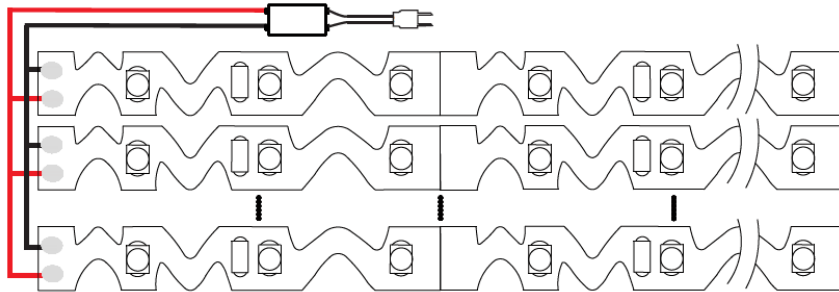

## Dimension:

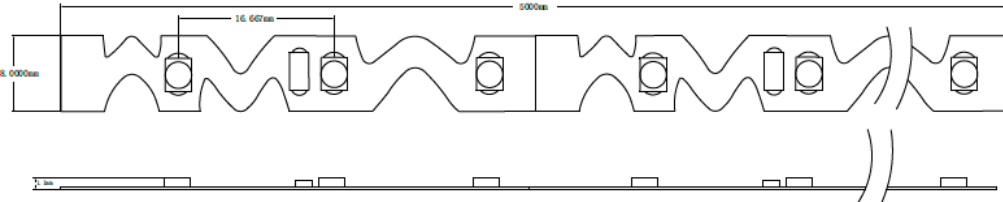

Model	LED Type	Leds/m	Watt/m	Voltage	Lumens/m	FPC Width(mm)
Tulight ZIGZAC	2835	72	7,2	12V	W/714	6

## Wavelength Scope(nm/K)

Red light	Green light	Blue light	Yellow light	Warm white	White light	Cool white
619-635	512-528	463-475	584-595	2700-3300K	5500-7000	>8000K

# Notes


1. The thickness of the wires shall be adopted based on the possible current, products power, length of the wire extention (5meter at maximum as recommended) and the loss in the wires transit at low voltage.
2. The both ends of extention shall be delt with as waterproof.
3. Don't work under the situations of touching in static-electronics environments or light on
- 4.The modules can be connected to 5m at maximum and no exceed.
- 5.Suggest choosing high-qualified switch power( have short electronics ,overvoltage and overloading protection function etc).

# Packaging information


Product name	Weight per pcs.	Packing bag dimension(mm)	Net weight(NG)	Gross Weight(WG)
		37*34*34cm	8.5±10%Kg	10±15%Kg

①Tolerance range for weight: ±10 %.


②With Heatsink.




5m per rool



1 rool in bag



50 rool in carton



size:37\*34\*34cm



www.tuplex.pl